

JB-FBH重型塑袋自动热封机系列

JB-FBH Heavy Duty Plastic Bag Automatic Heat Sealing Machine Series


FBH系列重型塑袋自动热封机可以连续封合较厚的PE或PP塑料袋，以及纸塑复合袋、铝塑复合袋。可供选择的配套装置有：袋口的除尘装置、排气装置等。该系列机型根据不同材质、厚度以及生产能力，选择适用的JB-FBH-32、JB-FBH-42、JB-FBH-52等机型。

FBH series heavy-duty plastic bag automatic heat sealing machine can continuously seal thicker PE or PP plastic bags, as well as paper-plastic composite bags and aluminum-plastic composite bags. The optional supporting devices are: dust removal device and exhaust device at the mouth of the bag. According to different materials, thickness and production capacity, this series of models such as JB-FBH-32, JB-FBH-42, JB-FBH-52, etc can be chosen.



重型塑袋自动热封机工作流程：

Work process of heavy-duty plastic bag automatic heat sealing machine:

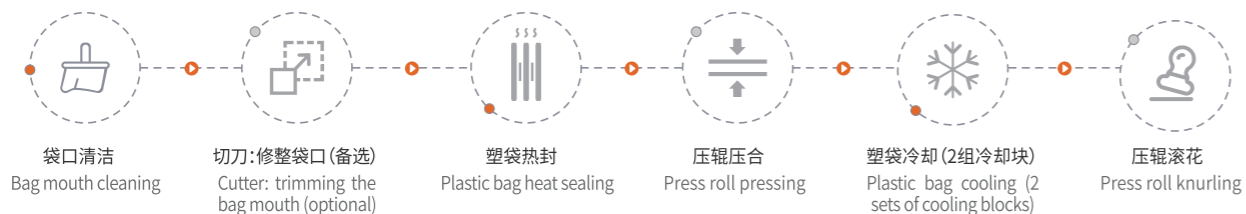

塑袋热封：(3组加热块加热+1组散热块：聚四氟乙烯封口带使加热块与袋子不直接接触，以保护袋子外表不与加热块粘连)

plastic bag heat sealing: (3 groups of heating blocks heating + 1 group of heat dissipation blocks: PTFE sealing tape to make heating blocks no direct contact with the bag to protect the surface of the bag from sticking to the heating block)

主要技术参数The main technical parameters

型号 Mode	JB-FBH-32	JB-FBH-42	JB-FBH-52
密封速度 Sealing Speed	7~12 m/min	7~12 m/min	7~12 m/min
加热块功率 Heating Block Power	0.5×6 Kw	0.5×8 Kw	0.5×10 Kw
密封机功率 Sealing Machine Power	0.4 Kw	0.55 Kw	0.55 Kw
袋口清洁功率 Cleaning Power Of Bag Mouth	0.55 Kw	0.55 Kw	0.55 Kw
总功率 Total Power	4 Kw	5.5 Kw	6.5 Kw
设备尺寸(mm) Equipment Size	2830×950×1780	3120×1020×2052	3305×1020×2052
重量 Weight	~300 Kg	~550 Kg	~600 Kg
封口高度(距地面) Sealing Height (Off the ground)	750~1450 mm	800~1700 mm	800~1700 mm
封口宽度 Sealing Width	8~10 mm	8~10 mm	8~10 mm
密封温度 Sealing Temperature	0~400°C	0~400°C	0~400°C
薄膜总厚度 Total Film Thickness	≤1.0 mm	≤1.0 mm	≤1.0 mm
适用范围 Scope Of Application	JB-FBH-32：聚乙烯(PE)、聚丙烯(PP)薄膜film JB-FBH-42：聚乙烯(PE)、聚丙烯(PP)薄膜film JB-FBH-52：聚乙烯(PE)、聚丙烯(PP)薄膜film		

JB-GKS热封缝合机系列

JB-GKS Heat Sealing stitching Machine Series


GKS系列热封缝合机应用于纸袋、多层牛皮纸袋与纸塑(PE)复合袋等的包装的热封口缝包。PE内袋采用热合方式处理，外袋先用线缝合再加热敏胶带热封，内外双向密封，确保物料起到防潮、防漏、防虫的效果，自动化程度高，性能稳定，操作方便，热缝合后的袋子密封性能好，美观整齐，深受广大用户的欢迎。适用于饲料、工程塑料颗粒、面粉、奶粉、食品添加剂等行业使用。

The GKS series heat-sealing stitching machine is used in the heat-sealing and stitching of paper bags, multi-layer kraft paper bags and paper-plastic (PE) composite bags. The PE inner bag is processed by heat sealing. The outer bag is sewn with first thread stitching and heat-sealed with heat-sensitive tape later. The inner and outer two-way sealing ensures that the material has the effect of moisture-proof, leak-proof and insect-proof. It has high automation, stable performance and convenient operation. Because of good sealing performance, beautiful appearance and neatness of the heat stitched bags, GKS series heat sealing machines are well acceptable by users and widely used in industries such as feed, engineering plastic pellets, flour, milk powder, and food additives and etc.



牛皮纸袋热封缝合工作流程(封包机)：

Kraft paper bag heat sealing and sewing work flow(sewing machine):

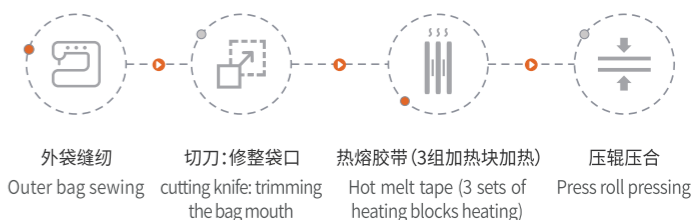

主要技术参数The main technical parameters

型号 Mode	JB-GKS-13D	JB-GKS-14D	JB-GKS-16D	JB-GKS-23D	JB-GKS-24D	JB-GKS-232D	JB-GKS-243D
密封速度 Sealing Speed	7~12 m/min	7~10 m/min	7~10 m/min	7~10 m/min	7~10 m/min	7~10 m/min	7~10 m/min
加热块功率 Heating Block Power	0.5×6 Kw	0.5×8 Kw	0.5×12 Kw	0.5×6 Kw	0.5×8 Kw	0.5×10 Kw	0.5×14 Kw
密封机功率 Sealing Machine Power	0.4 Kw	0.4 Kw	0.4 Kw	0.4 Kw	0.4 Kw	0.4 Kw	0.55 Kw
缝纫机功率 Sewing Machine Power	0.4 Kw	0.4 Kw	0.4 Kw	0.4 Kw	0.4 Kw	0.4 Kw	0.4 Kw
袋口清洁功率 Cleaning Power Of Bag Mouth	—	0.55 Kw (备选Alternative)	0.55 Kw (备选Alternative)	0.55 Kw (备选Alternative)	0.55 Kw (备选Alternative)	0.55 Kw (备选Alternative)	0.55 Kw (备选Alternative)
总功率 Total Power	4 Kw	5.5 Kw	8 Kw	4.5 Kw	5.5 Kw	6.5 Kw	8.5 Kw
设备尺寸(mm) Equipment Size	2250×1090×2052	2850×1090×2052	3250×1090×2052	2850×1090×2052	3000×1090×2052	3300×1090×2052	3670×1090×2052
重量 Weight	~490 Kg	~580 Kg	~800 Kg	~570 Kg	~620 Kg	~800 Kg	~850 Kg
缝合机头 Sewing Head	GS-7C (GS-11)	GS-7C (GS-11)	GS-11	GS-7C (GS-11)	GS-7C (GS-11)	GS-7C (GS-11)	GS-7C (GS-11)
封口高度(距地面) Sealing Height (Off The Ground)	800~1700mm	800~1700mm	800~1700mm	800~1700mm	800~1700mm	800~1700mm	800~1700mm
密封温度 Sealing Temperature	0~400°C	0~400°C	0~400°C	0~400°C	0~400°C	0~400°C	0~400°C
适用范围 Scope Of Application	JB-GKS-13D：3层平纸袋，袋内PE膜热封，外封热熔胶带 3 layers flat paper bag, inner PE film heat sealing, outer heat melting glue tape sealing JB-GKS-14D/JB-GKS-232D/JB-GKS-243D：4层平纸袋，袋内PE膜热封，外封热熔胶带 4 layers flat paper bag, inner PE film heat sealing, outer heat melting glue tape sealing JB-GKS-16D：6层平纸袋或3层M袋，袋内PE膜热封，外封热熔胶带 6 layers flat paper bag or 3 layers M side bags, inner bag PE film heat sealing, outer heat melting glue tape sealing JB-GKS-23D：3层平纸袋，袋内PE膜热封，外封皱纹纸带 3 layers flat paper bag, inner PE film heat sealing, outer wrinkle paper tape sealing JB-GKS-24D：4层平纸袋，袋内PE膜热封，外封皱纹纸带 4 layers flat paper bag, inner PE film heat sealing, outer wrinkle paper tape sealing						